

<b>SANYO</b>	No. 1409B	<b>LA7220</b>
	<b>Electronic Switch for VCR/Audio Use</b>	

## Overview

The LA7220 is a 3-channel 2-position high-performance analog switch having wide application from audio band to video band. It is also provided with 2 channels of muting function.


## Features

- 3-channel 2-position switch
- Wide input dynamic range
- Low distortion
- Good frequency characteristic
- Muting available

## Package Dimensions

unit : mm

### 3006B-DIP16

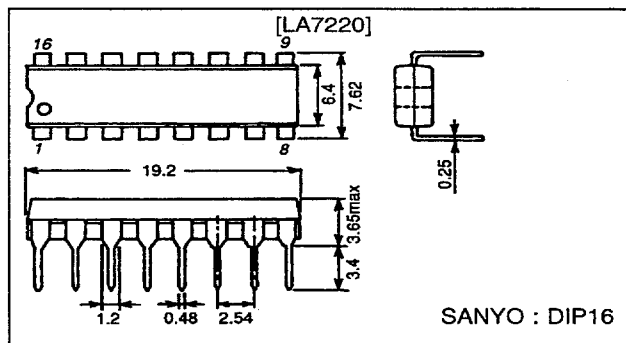

## Specifications

### Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V <sub>CC</sub> max		15	V
Allowable power dissipation	P <sub>d</sub> max	T <sub>a</sub> ≤ 65°C	500	mW
Operating temperature	T <sub>opr</sub>		-20 to +70	°C
Storage temperature	T <sub>stg</sub>		-40 to +125	°C

### Operating Conditions at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V <sub>CC</sub>		12	V
Operating voltage range	V <sub>CCop</sub>		9 to 13	V

### Operating Characteristics at Ta = 25°C, V<sub>CC</sub> = 12 V

Parameter	Symbol	Conditions	min	typ	max	Unit
Current drain	I <sub>CC</sub>			30.0	39.9	mA
Total harmonic distortion	THD	R <sub>g</sub> = 600 Ω, 4.5 V <sub>p-p</sub> , f = 1 kHz, R <sub>L</sub> = ∞, (Note 1)		0.007	0.1	%
Noise voltage	V <sub>NO</sub>	R <sub>g</sub> = 600 Ω, f = 20 Hz to 20 kHz, R <sub>L</sub> = ∞, (Note 1)		-93	-80	dBs
Crosstalk	1ch	CR1		-50		dB
	2ch	CR2	Input 1: R <sub>g</sub> = 50 Ω, 2 V <sub>p-p</sub> , f = 3.58 MHz, Input 2: R <sub>g</sub> = 500 Ω, (Note 2)	-60		dB
	3ch	CR3	Input 1: R <sub>g</sub> = 50 Ω, (Note 2)	-50		dB
Pedestal level	ΔV <sub>ped</sub>	V <sub>CTL</sub> (Pins 10, 13, 15) = 0 to 12 V, (Note 1)	-100		0 + 100	mV
Maximum input voltage	V <sub>IN</sub> max	R <sub>g</sub> = 600 Ω, f = 1 kHz, R <sub>L</sub> = ∞, THD = 1%, (Note 1)	5.0			V <sub>p-p</sub>

Continued on next page.

**SANYO Electric Co., Ltd. Semiconductor Business Headquarters**  
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

■ 7997076 0016978 145 ■

61096HA(II)/9068YT/8215KI, TS No.1409-1/6

# LA7220

Continued from preceding page.

Parameter	Symbol	Conditions	min	typ	max	Unit
2nd harmonic voltage	H2	$R_g = 50 \Omega$ , 4.0 Vp-p, $f = 1 \text{ MHz}$ , $R_L = \infty$ , (Note 1)	-46	-55		dB
3rd harmonic voltage	H3	$R_g = 50 \Omega$ , 4.0 Vp-p, $f = 1 \text{ MHz}$ , $R_L = \infty$ , (Note 1)	-46	-55		dB
Switch changeover voltage	$V_{CTLS}$	(Note 1)	2.6	3.1	4.0	V
Mute threshold voltage	$V_{ML}$	Low level, (Note 3)	1.1	1.5	1.9	V
	$V_{MH}$	High level, (Note 3)	6.6	7.3	8.0	V
Crosstalk between channels	1ch	$R_g = 500 \Omega$ , $R_L = \infty$ , other channel input $R_g = 50 \Omega$ , 2 Vp-p, $f = 3.58 \text{ MHz}$ , (Note 4)	-50	-68		dB
	2ch		-50	-68		dB
	3ch		-50	-68		dB
Mute compression ratio		$R_g = 600 \Omega$ , 2 Vp-p, $f = 1 \text{ kHz}$ , $R_L = \infty$ , series resistance 10 k $\Omega$ , (Note 3)		-60		dB
Control pin flow-in current	$I_{CTL}$	(Note 1)		8		$\mu\text{A}$
Input impedance	$Z_{IN}$	(Note 1)		10		k $\Omega$
Output impedance	$Z_{OUT}$	(Note 1)		29		$\Omega$
Pin voltage	(Pin 1)	$V_{pin1}$	$V_{pin15} = 0 \text{ V}$	Test point: V14	7.9	V
			$V_{pin15} = 12 \text{ V}$		7.9	V
	(Pin 2)	$V_{pin2}$		Test point: V2	7.2	V
	(Pin 5)	$V_{pin5}$	$V_{pin13} = 0 \text{ V}$	Test point: V16	7.9	V
			$V_{pin13} = 12 \text{ V}$		7.9	V
	(Pin 6)	$V_{pin6}$		Test point: V5	7.2	V
	(Pin 7)	$V_{pin7}$		Test point: V7	7.2	V
	(Pin 8)	$V_{pin8}$	$V_{pin10} = 0 \text{ V}$	Test point: V18	7.9	V
			$V_{pin10} = 12 \text{ V}$		7.9	V
	(Pin 9)	$V_{pin9}$	$V_{pin10} = 0 \text{ V}$	Test point: V17	7.9	V
			$V_{pin10} = 12 \text{ V}$		7.9	V
	(Pin 12)	$V_{pin12}$	$V_{pin13} = 0 \text{ V}$	Test point: V15	7.9	V
$V_{pin13} = 12 \text{ V}$			7.9		V	
(Pin 16)	$V_{pin16}$	$V_{pin15} = 0 \text{ V}$	Test point: V13	7.9	V	
		$V_{pin15} = 12 \text{ V}$		7.9	V	


Note 1. Measurements are made for each of 1ch, 2ch, 3ch using input A and input B.

Input A:  $V_{CTL}$  (pins 10, 13, 15) is 12 V at the measurement mode.

Input B:  $V_{CTL}$  is 0 V at the measurement mode.


2. Measurements are made using input A and B.
3. Measurements are made for 1ch, 3ch.
4. Measurements are made for each of 1ch, 2ch, 3ch using input A and B on other channels.

## Equivalent Circuit Block Diagram

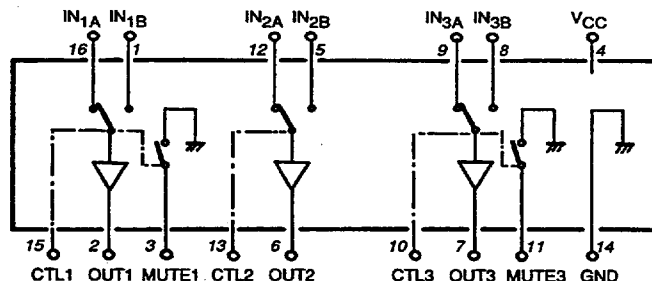

# LA7220

## Test Circuit

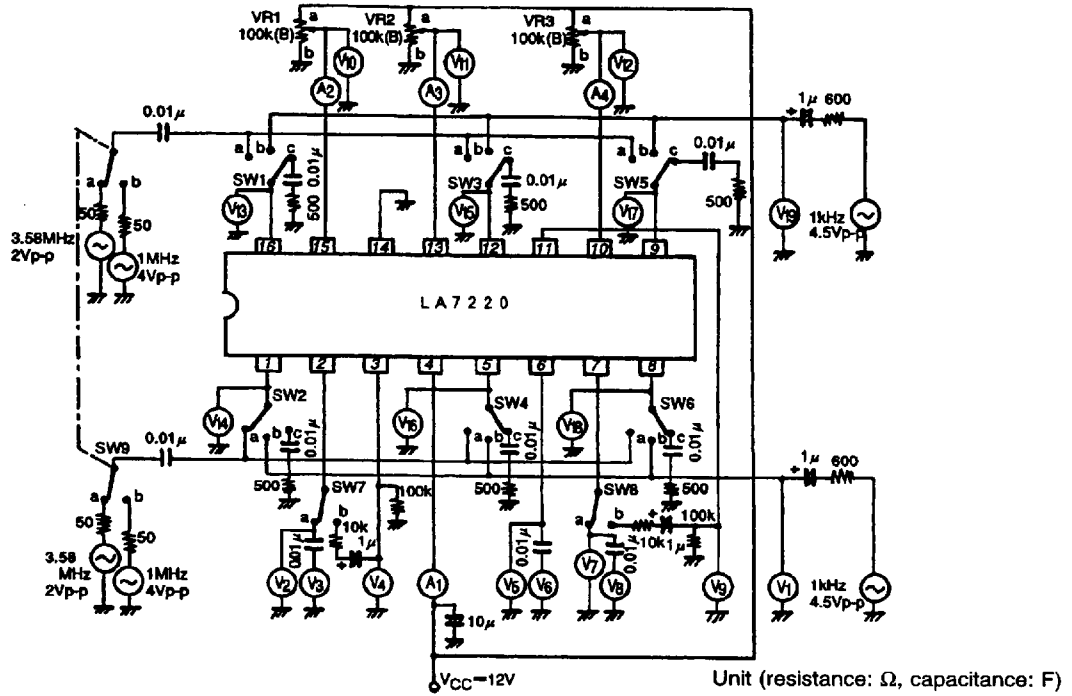

## Test Conditions

Item	Symbol	SW, VR mode											Test point			
		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW9	VR1	VR2		VR3		
Current drain	$I_{CC}$	c	c	c	c	c	c	c	a	a	a	a	b	b	b	A1
Total harmonic distortion	1chA THD	b	c	c	c	c	c	c	a	a	a	a	a	b	b	V3
	1chB THD	c	b	c	c	c	c	c	a	a	a	a	b	b	b	V3
	2chA THD	c	c	b	c	c	c	c	a	a	a	a	b	a	b	V6
	2chB THD	c	c	c	b	c	c	c	a	a	a	a	b	b	b	V6
	3chA THD	c	c	c	c	b	c	c	a	a	a	a	b	b	a	V8
	3chB THD	c	c	c	c	c	c	b	a	a	a	a	b	b	b	V8
Noise	1chA $V_{NO}$	c	c	c	c	c	c	c	a	a	a	a	a	b	b	V3
	1chB $V_{NO}$	c	c	c	c	c	c	c	a	a	a	a	b	b	b	V3
	2chA $V_{NO}$	c	c	c	c	c	c	c	a	a	a	a	b	a	b	V6
	2chB $V_{NO}$	c	c	c	c	c	c	c	a	a	a	a	b	b	b	V6
	3chA $V_{NO}$	c	c	c	c	c	c	c	a	a	a	a	b	b	a	V8
	3chB $V_{NO}$	c	c	c	c	c	c	c	a	a	a	a	b	b	b	V8
Crosstalk	1chA CR	c	a	c	c	c	c	c	a	a	a	a	a	b	b	V3
	1chB CR	a	c	c	c	c	c	c	a	a	a	a	b	b	b	V3
	2chA CR	c	c	c	a	c	c	c	a	a	a	a	b	a	b	V6
	2chB CR	c	c	a	c	c	c	c	a	a	a	a	b	b	b	V6
	3chA CR	c	c	c	c	c	c	a	a	a	a	a	b	b	a	V8
	3chB CR	c	c	c	c	a	c	c	a	a	a	a	b	b	b	V8
Pedestal level	1ch $\Delta V_{PED}$	c	c	c	c	c	c	c	a	a	a	a	a/b	b	b	V2
	2ch $\Delta V_{PED}$	c	c	c	c	c	c	c	a	a	a	a	b	a/b	b	V5
	3ch $\Delta V_{PED}$	c	c	c	c	c	c	c	a	a	a	a	b	b	a/b	V7

No.1409-3/6

7997076 0016980 8T3

LA7220

Item	Symbol	SW, VR mode											Test point		
		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW9	VR1	VR2		VR3	
Maximum input voltage	1chA	V <sub>IN</sub> max	b	c	c	c	c	c	a	a	a	a	b	b	V19
	1chB	V <sub>IN</sub> max	c	b	c	c	c	c	a	a	a	b	b	b	V1
	2chA	V <sub>IN</sub> max	c	c	b	c	c	c	a	a	a	b	a	b	V19
	2chB	V <sub>IN</sub> max	c	c	c	b	c	c	a	a	a	b	b	b	V1
	3chA	V <sub>IN</sub> max	c	c	c	c	b	c	a	a	a	b	b	a	V19
	3chB	V <sub>IN</sub> max	c	c	c	c	c	b	a	a	a	b	b	b	V1
2nd harmonic voltage	1chA	H2-1	a	c	c	c	c	c	a	a	b	a	b	b	V3
	1chB	H2-1	c	a	c	c	c	c	a	a	b	b	b	b	V3
	2chA	H2-2	c	c	a	c	c	c	a	a	b	b	a	b	V6
	2chB	H2-2	c	c	c	a	c	c	a	a	b	b	b	b	V6
	3chA	H2-3	c	c	c	c	a	c	a	a	b	b	b	a	V8
	3chB	H2-3	c	c	c	c	c	a	a	a	b	b	b	b	V8
3rd harmonic voltage	1chA	H3-1	a	c	c	c	c	c	a	a	b	a	b	b	V3
	1chB	H3-1	c	a	c	c	c	c	a	a	b	b	b	b	V3
	2chA	H3-2	c	c	a	c	c	c	a	a	b	b	a	b	V6
	2chB	H3-2	c	c	c	a	c	c	a	a	b	b	b	b	V6
	3chA	H3-3	c	c	c	c	a	c	a	a	b	b	b	a	V8
	3chB	H3-3	c	c	c	c	c	a	a	a	b	b	b	b	V8
Switch changeover voltage	1ch	V <sub>CTLS</sub>	a	a	c	c	c	c	a	a	a	Var*	b	b	V10
	2ch	V <sub>CTLS</sub>	c	c	a	a	c	c	a	a	a	b	Var*	b	V11
	3ch	V <sub>CTLS</sub>	c	c	c	c	a	a	a	a	a	b	b	Var*	V12
Mute threshold	1ch	V <sub>ML</sub>	b	b	c	c	c	c	b	a	a	Var*	b	b	V10
	1ch	V <sub>MH</sub>	b	b	c	c	c	c	b	a	a	Var*	b	b	V10
	3ch	V <sub>ML</sub>	c	c	c	c	b	b	a	b	a	b	b	Var*	V12
	3ch	V <sub>MH</sub>	c	c	c	c	b	b	a	b	a	b	b	Var*	V12
Crosstalk between channels	1ch		c	c	c	c	a	c	a	a	a	a	a	a	V3
	1ch		c	c	c	c	c	a	a	a	a	a	a	b	V3
	1ch		c	c	c	c	a	c	a	a	a	a	b	a	V3
	1ch		c	c	c	c	c	a	a	a	a	a	b	b	V3
	1ch		c	c	a	c	c	c	a	a	a	b	a	a	V3
	1ch		c	c	a	c	c	c	a	a	a	b	a	b	V3
	1ch		c	c	c	a	c	c	a	a	a	b	b	a	V3
	1ch		c	c	c	a	c	c	a	a	a	b	b	b	V3
	2ch		c	c	c	c	a	c	a	a	a	a	a	a	V6
	2ch		c	c	c	c	c	a	a	a	a	a	a	b	V6
	2ch		c	c	c	c	a	c	a	a	a	b	a	a	V6
	2ch		c	c	c	c	c	a	a	a	a	b	a	b	V6
	2ch		a	c	c	c	c	c	a	a	a	a	b	a	V6
	2ch		a	c	c	c	c	c	a	a	a	a	b	b	V6
	2ch		c	a	c	c	c	c	a	a	a	b	b	a	V6
	2ch		c	a	c	c	c	c	a	a	a	b	b	b	V6
	3ch		c	c	a	c	c	c	a	a	a	a	a	a	V8
	3ch		c	c	c	a	c	c	a	a	a	a	b	a	V8
	3ch		c	c	a	c	c	c	a	a	a	b	a	a	V8
	3ch		c	c	c	a	c	c	a	a	a	b	b	a	V8
	3ch		a	c	c	c	c	c	a	a	a	a	a	b	V8
	3ch		a	c	c	c	c	c	a	a	a	a	b	b	V8
	3ch		c	a	c	c	c	c	a	a	a	b	a	b	V8
	3ch		c	a	c	c	c	c	a	a	a	b	b	b	V8
Mute compression ratio	1ch		b	b	c	c	c	c	b	a	a	Var*	b	b	V4
	3ch		c	c	c	c	b	b	a	b	a	b	b	Var*	V9



# LA7220

Item	Symbol	SW,VR mode												Test point	
		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW9	VR1	VR2	VR3		
Control pin flow-in current	1ch	$I_{CTL1}$	c	c	c	c	c	c	a	a	a	a	b	b	A2
	2ch	$I_{CTL2}$	c	c	c	c	c	c	a	a	a	a	b	a	A3
	3ch	$I_{CTL3}$	c	c	c	c	c	c	a	a	a	a	b	b	A4
Pin voltage	(Pin 1)	$V_{pin1}$	c	c	c	c	c	c	a	a	a	b	b	b	V14
	(Pin 1)	$V_{pin1}$	c	c	c	c	c	c	a	a	a	a	b	b	V14
	(Pin 2)	$V_{pin2}$	c	c	c	c	c	c	a	a	a	b	b	b	V2
	(Pin 5)	$V_{pin5}$	c	c	c	c	c	c	a	a	a	b	b	b	V16
	(Pin 5)	$V_{pin5}$	c	c	c	c	c	c	a	a	a	b	a	b	V16
	(Pin 6)	$V_{pin6}$	c	c	c	c	c	c	a	a	a	b	b	b	V5
	(Pin 7)	$V_{pin7}$	c	c	c	c	c	c	a	a	a	b	b	b	V7
	(Pin 8)	$V_{pin8}$	c	c	c	c	c	c	a	a	a	b	b	b	V18
	(Pin 8)	$V_{pin8}$	c	c	c	c	c	c	a	a	a	b	b	a	V18
	(Pin 9)	$V_{pin9}$	c	c	c	c	c	c	a	a	a	b	b	b	V17
	(Pin 9)	$V_{pin9}$	c	c	c	c	c	c	a	a	a	b	b	a	V17
	(Pin 12)	$V_{pin12}$	c	c	c	c	c	c	a	a	a	b	b	b	V15
	(Pin 12)	$V_{pin12}$	c	c	c	c	c	c	a	a	a	b	a	b	V15
	(Pin 16)	$V_{pin16}$	c	c	c	c	c	c	a	a	a	b	b	b	V13
(Pin 16)	$V_{pin16}$	c	c	c	c	c	c	a	a	a	a	b	b	V13	

(Note) Var\*: While monitoring pins 2, 6, 7, adjust so that the minimum output is obtained.

Mute Threshold: While monitoring pins 3, 11, measure the minimum and maximum values of V10, V12 when the minimum output is obtained.

